

WL183, WL184, AND WL185 LAVALIER MICROPHONES

GENERAL

Models WL183, WL184 and WL185 are lavalier electret condenser microphones designed for use with a wireless bodypack transmitter. Each microphone has a 1.2 meter (4 ft.) cable terminated with a miniature Switchcraft TA4F connector. The furnished tie clip can be rotated in 90° intervals for placement flexibility.

APPLICATIONS

WL183 (Omnidirectional): Recommended for general purpose sound reinforcement, recording, or remote monitoring applications. Low handling noise. Pickup angle is 360°.

WL184 (Supercardioid): Recommended for sound reinforcement applications requiring high rejection of ambient noise and narrow pickup angle. Use of windscreen highly recommended. Pickup angle is 115°.

WL185 (Cardioid): Recommended for general purpose sound reinforcement applications requiring good rejection of ambient noise. Use of windscreen highly recommended. Pickup angle is 130°.


INSTALLATION

1. Insert the top of the microphone through tie clip loop from below until tie clip loop snaps into place over the lower groove on the microphone. Refer to the following illustration.
2. To install the snap-fit windscreen, press it down on the microphone until it clicks into place inside the upper groove on the microphone. The snap-fit windscreen provides 30 dB of pop protection.

NOTE: The snap-fit windscreen can be removed by spreading the slot in the plastic snap-fit ring.

OR

To install the smaller foam windscreen, slip the windscreen over the top of the microphone so that it covers the side slots. The foam windscreen provides 5 to 10 dB of pop protection.

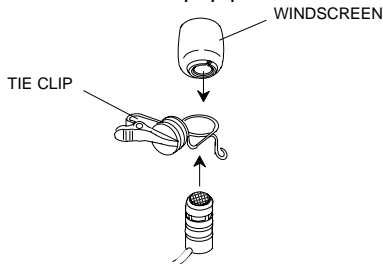

3. Attach the microphone approximately 76 mm to 152 mm (3 to 6 in.) below the neckline.

NOTE: Do not cover the microphone with your hand or clothing.

CHANGING CARTRIDGES

The WL183, WL184, and WL185 microphones use interchangeable cartridges. To remove the cartridge, unscrew the tip of the microphone and remove it. Install the replacement cartridge by screwing it onto the microphone base.

REPLACEMENT PARTS AND ACCESSORIES

Omnidirectional Cartridge	R183B
Supercardioid Cartridge	R184B
Cardioid Cartridge	R185B
Snap-fit Windscreens (4)	RK183BWS
Foam Windscreen (4)	RK261WS
Tie clips (2)	RK183T1
Miniature 4-pin connector	WA330




27B2833 (AA)

©2001, Shure Incorporated


SPECIFICATIONS

Type: Condenser (electret bias)

Frequency Response: 50 to 17,000 Hz

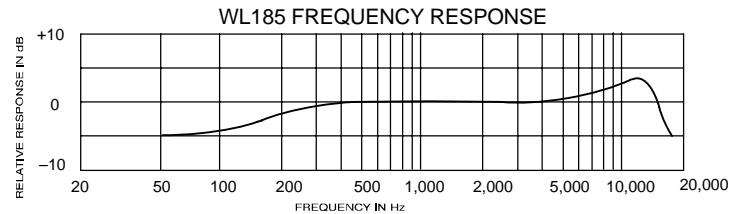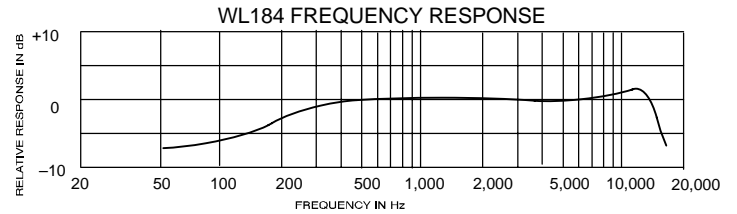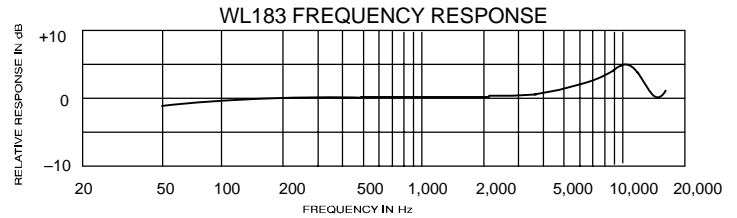

Polar Patterns (at 1 kHz):

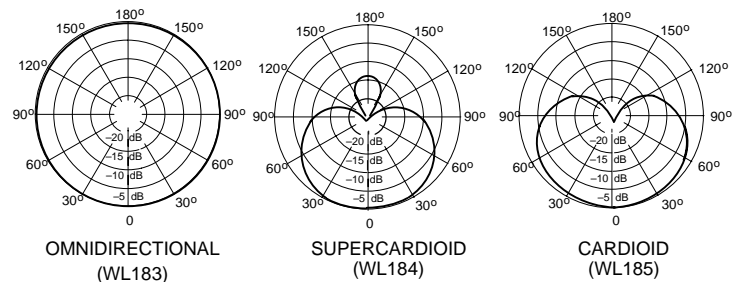

Output Impedance: 1800 Ω

Sensitivity (1 Pa = 94 dB SPL):
 WL183: -40.0 dBV/Pa
 WL184: -44.5 dBV/Pa
 WL185: -45.5 dBV/Pa

Maximum Sound Pressure Level:
 WL183: 125.0 dB SPL
 WL184: 129.5 dB SPL
 WL185: 130.5 dB SPL


Output Noise (A-weighted):
 WL183: 22.5 dB SPL
 WL184: 27.0 dB SPL
 WL185: 28.0 dB SPL


Dynamic Range: 102.5 dB

Polarity: Positive pressure on diaphragm produces positive voltage on pins 3 and 4 relative to pin 1.

Power Requirements: Regulated nominal +5 Vdc (1.5 Vdc to 10 Vdc) provided at microphone connector pin 2 relative to pin 1 of a Shure wireless microphone transmitter.

NOTE: For additional technical assistance, phone Shure at (847) 866-2200. In Europe, phone 49-7131-72140.

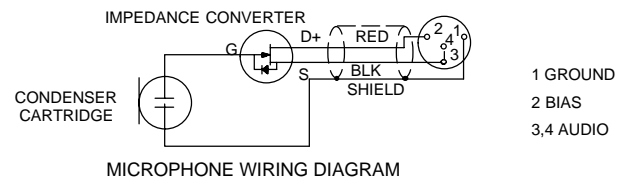



WL93, WL93T, WL93-6, WL93-6T LAVALIER MICROPHONES

GENERAL

Model WL93 Microphones are omnidirectional, subminiature, lavalier electret condenser microphones designed for use in TV broadcasting, theater, and sound reinforcement applications where a visually unobtrusive microphone is desirable.


All WL93 models are supplied with a mounting block with attached tie bar, a sew-on mounting bracket, and an acoustic windscreen to minimize wind noise in outdoor applications. All WL93 models include a 1.2 m (4 ft.) cable terminated with a miniature 4-pin connector (Switchcraft TA4F type) which connects directly to a Shure wireless body-pack transmitter.

VARIATIONS

- **WL93:** Black finish; includes 1.2 m (4 ft. cable)
- **WL93T:** Tan finish; includes 1.2 m (4 ft. cable)
- **WL93-6:** Black finish; includes 1.9 m (6 ft. cable)
- **WL93-6T:** Tan finish; includes 1.9 m (6 ft. cable)

INSTALLATION

1. To mount a WL93 to the tie clip, snap the microphone into the mounting bracket and attach the clip to an article of clothing.
2. To install the foam windscreen, slip it over the top of the microphone. The foam windscreen provides 5 to 10 dB of pop protection.

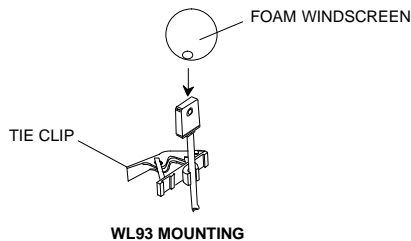


REPLACEMENT PARTS AND ACCESSORIES

Windscreen, Charcoal Gray	RK355WS
Tie Clip, Black (2 each)	RK354SB
Tan Windscreen	RK304T
Double Tie Clip	RK307DB
Tan Tie Clip Assembly	90B4327
Black Sew-on Mounting Bracket	65B1733
Tan Sew-on Mounting Bracket	65B1733A
Zippered Carrying Bag	26A13

SPECIFICATIONS

Type: Condenser (electret bias)

Frequency Response: 50 to 20,000 Hz

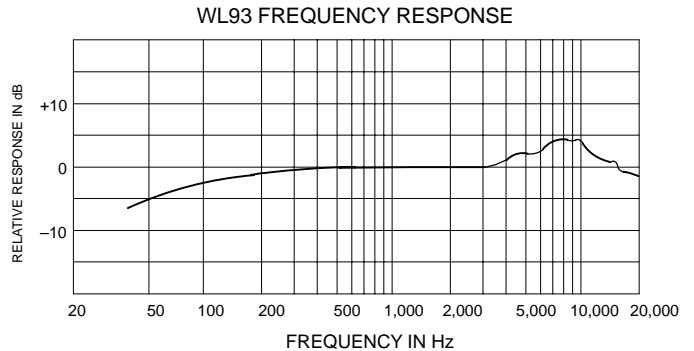

Polar Pattern: Omnidirectional, uniform with frequency

Output Impedance: 3000 Ω

Sensitivity (1 Pa = 94 dB SPL): -38 dBV/Pa

Maximum Sound Pressure Level: 120 dB SPL


Dynamic Range: 102 dB

Output Noise (A-weighted): 18 dB SPL

Polarity: Positive pressure on microphone diaphragm produces positive voltage on pin 3 with respect to pin 1 (ground)

Power Requirements: Regulated nominal +5 Vdc (2 Vdc to 10 Vdc) source provided at microphone connector pin 2 relative to pin 1 of a Shure wireless body-pack transmitter.

NOTE: For additional technical assistance, phone Shure at 1-800-516-2525. In Europe, phone 49-7131-72140.

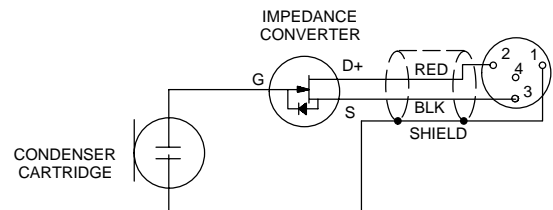

MICROPHONE WIRING DIAGRAM