


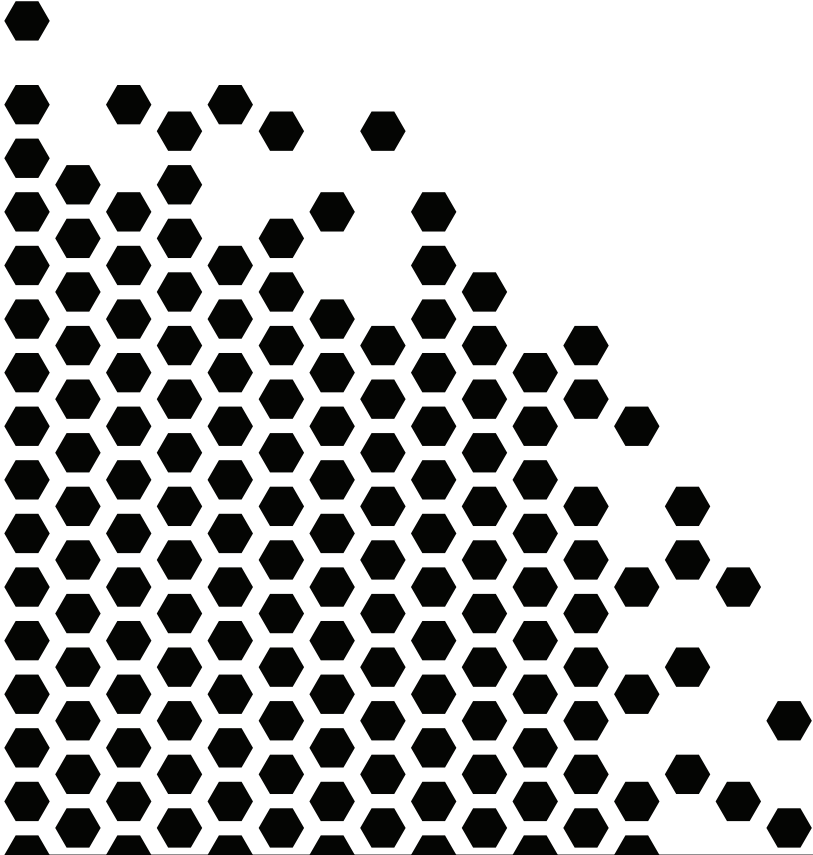

monitoraudio.com/support

Creator Series


In-Ceiling - Quick Start Guide

12


MONITOR AUDIO

EN	Nominal Impedance	Power Handling (RMS into Nominal Impedance, Pink Noise with 6dB Crest Factor)	Cut Out Diameter	Mounting Depth	External Dimensions (Inc. grille where fitted) (Ø x D)	Weight
FR	Impédance nominale	Puissance nominale RMS	Découpe des dimensions	Profondeur de montage	Dimensions externes (incluant les plaques de balancier, grille et pieds + pointes) (Ø x P)	Poids du produit
IT	Impedenza nominale	Tenuta di potenza RMS	Dimensioni foro	Profondità di montaggio	Dimensioni esterne (Inclusi stabilizzatori, griglia e punte e piedini) (Ø x P)	Peso del prodotto
DE	Nennimpedanz	Leistungsfähigkeit (RMS)	Ausschnitt	Einbautiefe	Außenabmessungen (einschließlich Auslegerplatten, Gitter und Fußer+Stifte) (Ø x T)	Produktge- wicht
ES	Impedancia nominal	Potencia (R.M.S)	Dimensiones de corte	Profundidad de montaje	Dimensiones externas (con placas estabilizadoras, rejillas y pies+puntes) (Ø x P)	Peso del producto
PT	Impedância nominal	Potência de áudio (RMS)	Dimensões de corte	Profundidade de montagem	Dimensões externas (incluindo extensores laterais, grelha e pés + espigões) (Ø x P)	Peso do produto
NL	Nominale Impedantie	Vermogen (R.M.S.)	Afmetingen uitsparing	Montage diepte	Externe afmetingen (Inclusief steiplaten, grille en voetsjes+spijkers) (Ø x D)	Gewicht product
CN	标称阻抗	功率容量 R.M.S	裁剪尺寸	安装深度	外部尺寸 (含外伸支架及螺钉组件+脚钉) (ØxL)	重量
RU	Сопоставление	Мощность (RMS)	Размеры монтажного отверстия	Монтажная глубина	Габариты, включая опорную плиту, гриль и шпиль (Ø x Г)	Вес
JP	公称インピーダンス	電力処理 (R.M.S)	カットアウト寸法	取付深さ	外部寸法 (アウトリガープレートと脚部+スバイクを含む) (Ø x 実行)	製品重量
AR	المقاومة الاسمية	طريقة التعامل مع الطاقة (حد متوسط المربع)	الزيباد	تصاعد العمق	الابعاد الخارجية (بما في ذلك الشبكة) (الطول x العرض)	وزن المنتج
PL	Impedancja nominalna	Moc ciągła R.M.S.	Wymiary wycięcia	Głębokość montażowa	Zewnętrzne wymiary (wraz z wysięgnikami, nożkami i kołkami) (Ø x D)	Waga produktu
C1S	8 Ohms	50 W	Ø 171 mm	99 mm	Ø 201 x 103 mm Ø 7 15/16 x 4 4/16"	1.4 kg 3 lb 1 oz
C1M	8 Ohms	65 W	Ø 212 mm	99 mm	Ø 242 x 103 mm Ø 9 1/2 x 4 4/16"	1.9 kg 4 lb 3 oz
C1L	8 Ohms	75 W	Ø 248 mm	99 mm	Ø 278 x 103 mm Ø 10 11/16 x 4 4/16"	2.5 kg 5 lb 8 oz
C2S	8 Ohms	65 W	Ø 171 mm	99 mm	Ø 201 x 103 mm Ø 7 15/16 x 4 4/16"	1.5 kg 3 lb 5 oz
C2M	8 Ohms	75 W	Ø 212 mm	99 mm	Ø 242 x 103 mm Ø 9 1/2 x 4 4/16"	2 kg 4 lb 6 oz
C2M-TX	4 Ohm (Mono) 8 Ohm (Stereo)	150 W (Mono) 2 x 75 W (Stereo)	Ø 212 mm	99 mm	Ø 242 x 103 mm Ø 9 1/2 x 4 4/16"	2.1 kg 4 lb 10 oz
C2M-CP	8 Ohms	65 W	Ø 212 mm	177.5 mm	Ø 242 x 181.5 mm Ø 9 1/2 x 7 1/8"	2.6 kg 5 lb 11 oz
C2L	8 Ohms	120 W	Ø 248 mm	99 mm	Ø 278 x 103 mm Ø 10 11/16 x 4 4/16"	2.5 kg 5 lb 8 oz
C2L-TX	4 Ohm (Mono) 8 Ohm (Stereo)	240 W (Mono) 2 x 120 W (Stereo)	Ø 248 mm	99 mm	Ø 278 x 103 mm Ø 10 11/16 x 4 4/16"	2.7 kg 6 lb
C2L-CP	8 Ohms	100 W	Ø 248 mm	177.5 mm	Ø 278 x 181 mm Ø 10 11/16 x 7 1/8"	3.3 kg 7 lb 5 oz
C2L-A	8 Ohms	120 W	Ø 248 mm	99 mm	Ø 278 x 103 mm Ø 10 11/16 x 4 4/16"	2.5 kg 5 lb 8 oz
C3M	6 Ohms	120 W	Ø 212 mm	147.5 mm	Ø 242 x 151 mm Ø 9 1/2 x 5 15/16"	3.4 kg 7 lb 8 oz
C3L	6 Ohms	150 W	Ø 248 mm	157 mm	Ø 278 x 161 mm Ø 10 11/16 x 6 5/16"	5 kg 11 lb
C3L-CP	6 Ohms	120 W	Ø 248 mm	177.5 mm	Ø 278 x 181 mm Ø 10 11/16 x 7 1/8"	5.7 kg 12 lb 10 oz
C3L-A	6 Ohms	150 W	Ø 248 mm	157 mm	Ø 278 x 161 mm Ø 10 11/16 x 6 5/16"	5.1 kg 11 lb 3 oz


1 - Draw around template & cut hole

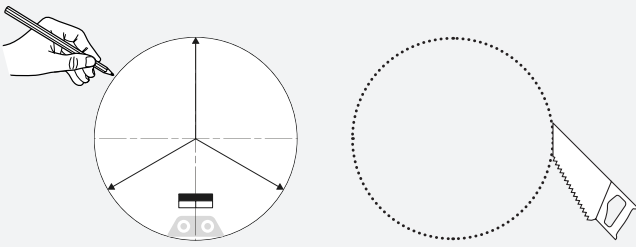


2 - Run cabling to cut-out hole

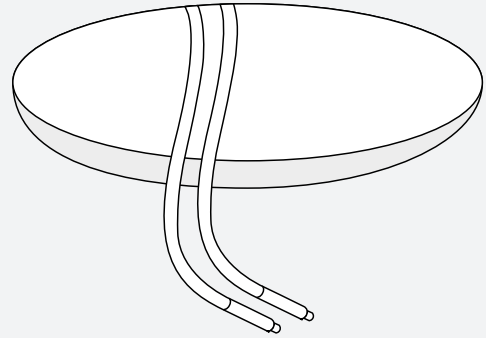


3 - Pinch clips & remove Quik-Link terminal

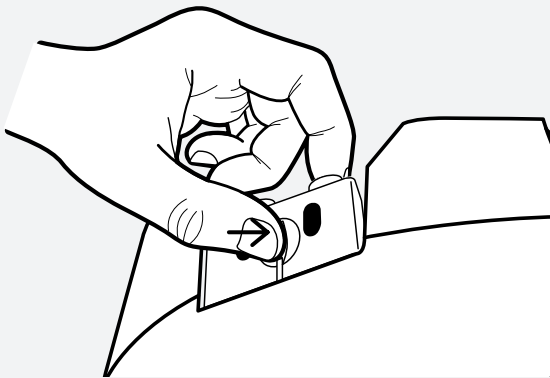


4 - Connect cable to Quik-Link terminal

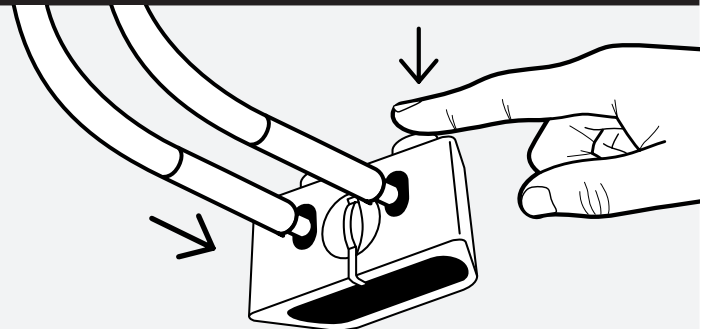


5 - Connect Quik-Link terminal to speaker

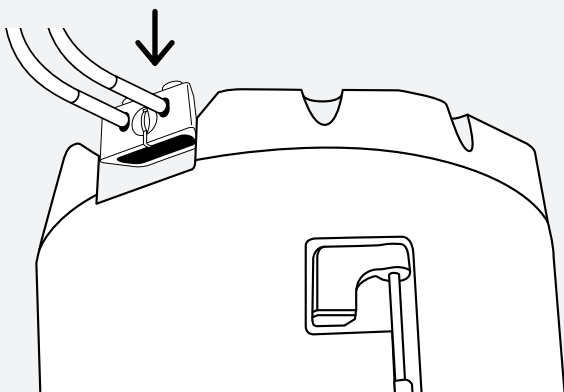

6 - Guide speaker into cut-out hole

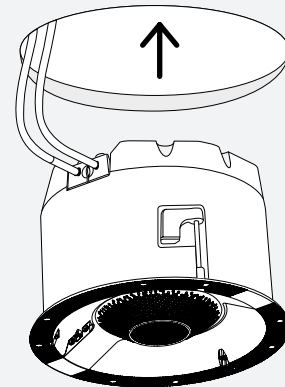

7 - Tighten Tri-Grip II screws

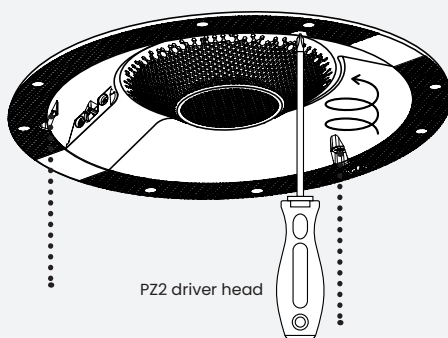

P22 driver head

Tri-Grip x 3 = 5Kgf/cm; 4.34 lbf/inch; 0.5 NM

8 - Attach grille

