

# NTG4+

Directional Condenser Microphone


**AUSTRALIA**  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

**USA**  
PO Box 91028, Long Beach CA 90809-1028  
Ph: +1 562 364 7400 Fax: +1 888 412 4664




## Frequency response


FLAT

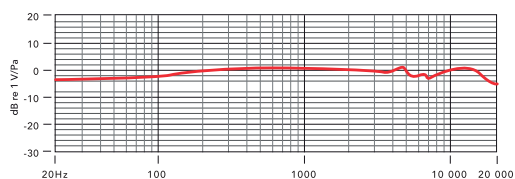

HIGH BOOST

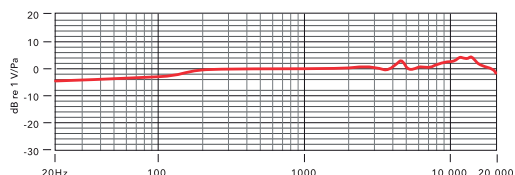

HIGH PASS

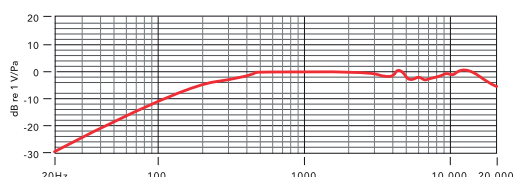

## Features

- Broadcast sound quality
- Low noise circuitry
- Condenser transducer
- Rugged metal construction
- Internal rechargeable battery with 150 hours operation
- High Frequency Boost
- High Pass Filter (0Hz/75Hz)
- PAD (-10db)
- Designed and manufactured in Australia
- Full 10 year warranty (with online registration)



## Incl. accessories

- RM5 Mic Clip
- Foam Windshield
- ZP1 Pouch
- Micro USB

## Specifications

|                       |  |
|-----------------------|--|
| Acoustic Principle    | Line Gradient  |
| Directional Pattern   | Super-Cardioid   |
| Frequency Range       | 20Hz ~ 20,000Hz (selectable HPF @ 75Hz)  |
| Sensitivity           | -32dB re 1V/Pa (25mV @ 94dB SPL) ±2dB @ 1kHz.                                    |
| Output Impedance      | 200Ω   |
| Equivalent Noise      | 16dBA SPL (per IEC651)   |
| Maximum Output        | 7dBu (@ 1kHz, 1% THD into 1kΩ)   |
| Dynamic Range         | 119dB (per IEC651)   |
| Maximum SPL           | 135dB  |
| Signal to Noise Ratio | 78dB SPL (per IEC651)  |
| Power Req.            | 48V Phantom Power (4.8mA current draw) or internal rechargeable lithium battery. |
| Battery Charger       | MicroUSB cable (supplied)  |
| Output Connection     | 3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)       |
| Dimensions            | 22 x 278mm   |
| Net Weight            | 176g   |

## Polar pattern

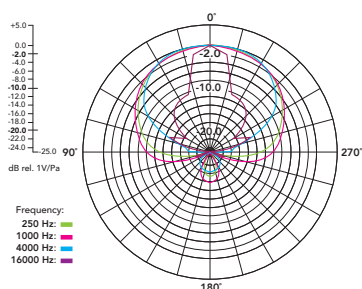

**RØDE**  
MICROPHONES