

SubZero

SZS-P SERIES SPEAKERS

SZS-P8A / SZS-P12A / SZS-P15A

USER MANUAL

INTRODUCTION


Thank you for purchasing one of the speakers in our SZS-P series. To get the most out of your product, please read this manual carefully.

BOX CONTENTS

- 1 x SZS-P Series Speaker
- 1 x User guide
- 1 x UK power cable
- 1 x EU power cable

FEATURES

- Powerful PA speakers ideal for indoor and outdoor live events.
- Sculpt your sound to perfection with the integrated 2-band EQ (Active series only).
- Integrated digital media player with Bluetooth connectivity allows you to play your tracks wherever you like.
- Rugged design ensures the speaker is built to withstand the rigours of continued use.
- Easy to transport thanks to lightweight, compact design.

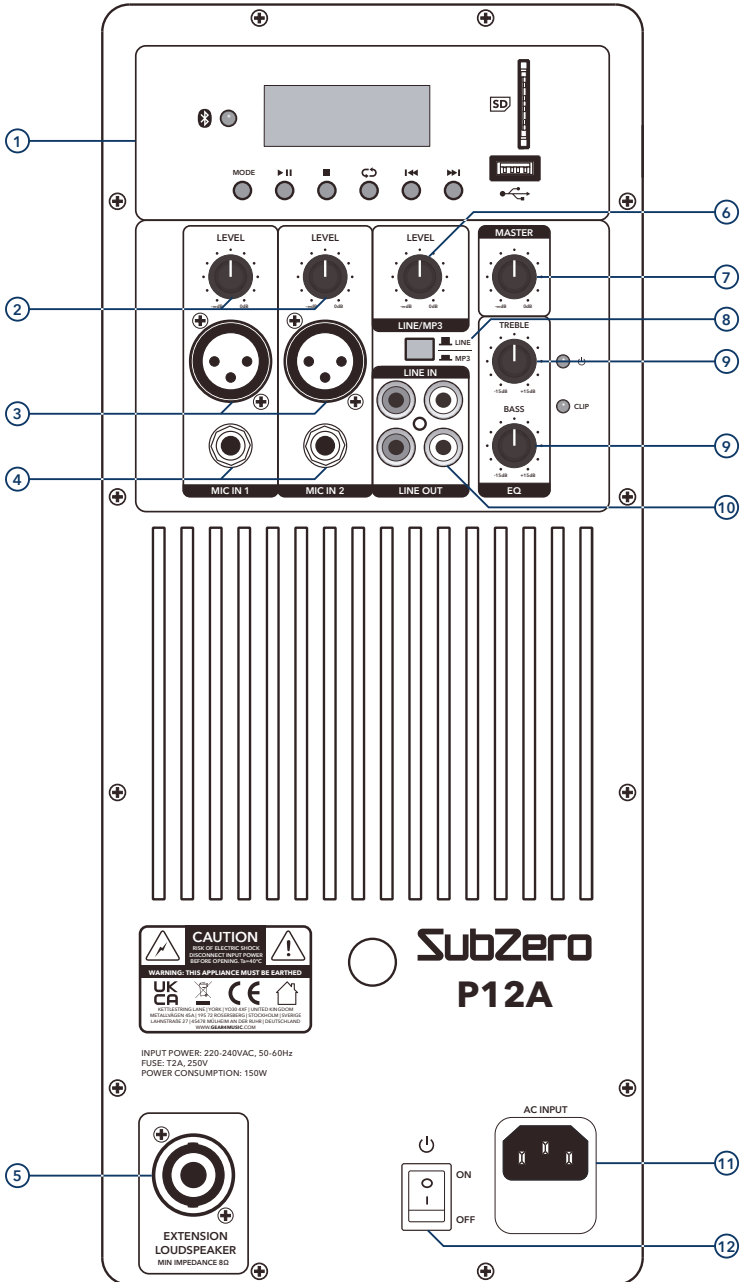

CAUTION
 RISK OF ELECTRIC SHOCK
 DO NOT OPEN
 RISK OF FIRE
 DO NOT COVER VENTILATION HOLES

WARNING: THIS APPLIANCE MUST BE EARTHED

UK CA CE

NEI ELETTRICI NON APERIRE QUESTO DISPOSITIVO
 METALLURGI PER IL RISPETTO DELLE LEGGI
 L'APERTURA DI QUESTO DISPOSITIVO SENZA IL CONSENSO
 DELLA SUBZERO P12A

SubZero
P12A

INPUT POWER: 220-240VAC, 50-60Hz
 FUSE: T2A, 250V
 POWER CONSUMPTION: 150W

EXTENSION LOUDSPEAKER
 MIN IMPEDANCE 8Ω

AC INPUT

ON
 OFF

FUNCTIONS

BACK PANEL

1. DIGITAL MEDIA PLAYER

Enables you to play music through the speaker using a variety of platforms. For more information please see page 6.

2. LEVEL

Use this knob to increase/decrease the gain of each input.

3. XLR INPUT

Use this input to connect a dynamic or ribbon microphone to the PA speaker.

4. ¼" JACK INPUT

Use this input to connect line-level sources such as direct guitars, basses, keyboards and synthesizers.

5. EXTENSION

Connect an additional speaker here.

6. LEVEL

Use this knob to adjust the volume of the line in input.

7. MASTER

Use this knob to adjust the global volume of the speaker, including the output of the media player.

8. LINE / MP3

Press this button to switch between line and MP3 playback.

9. EQ

Use the 2-band EQ to fine tune the bass and treble response of the speaker.

10. LINE IN / LINE OUT

Use these inputs to connect external audio devices and send line output audio to an additional speaker or mixer.


11. AC INPUT

Connect your power source to the mains here.

12. POWER

Use this button to turn the speaker on/off.

DIGITAL MEDIA PLAYER

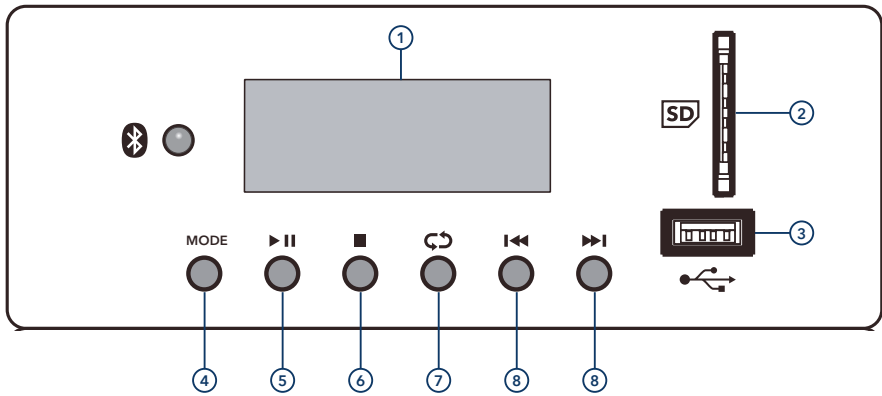

1. DISPLAY

This screen displays all relevant information.

2. SD / MMC

Insert an SD card here to playback MP3 audio files.

3. USB

Insert a USB card here to playback MP3 audio files.

4. MODE

Press this button to alternate between media sources.

5. PLAY / PAUSE

Press this button to play or pause the current track.

6. STOP

Press this button to stop playback.

7. REPEAT

Press this button to cycle through all repeat mode options. These consist of random, single and all.

8. SKIP

Press this button to select the next track.

To connect a Bluetooth device to the digital media player, please use the following steps.

- Ensure that the mixer is powered on and within range of the Bluetooth device.
- Press the MODE button on the speaker's digital media player until 'Bluetooth' is displayed on the screen.
- Open the Bluetooth settings on the Bluetooth enabled device.
- Scan for Bluetooth devices and search for 'PMIX4-MP' / 'PMIX6-MP' or 'PMIX8-MP' in the devices' list.
- Select the mixer and the Bluetooth enabled device should confirm that it is now connected.

SPECIFICATIONS

SZS-P8A

Input power230V AC, 50Hz

RMS power60W

Peak power240W

Max power.....240W

LF speaker8" woofer with 1.18"
voice coil

HF speaker1" compression driver

Storage.....USB and SD card

File system.....FAT32

Playback formatMP3, WAV

Number of files.....Max 999

InputsCombo
RCA

OutputsStereo RCA,
powered speaker out

Max SPL107dB

Fraquency range90Hz - 18KHz

Dimensions
(W x H x D).....390 x 260 x 200mm

Weight5.3Kg

SZS-P12A

Input power230V AC, 50Hz

RMS power140W

Peak power560W

Max power.....600W

LF speaker12" woofer with 1.5"
voice coil

HF speaker1" compression driver

Storage.....USB and SD card

File system.....FAT32

Playback formatMP3, WAV

Number of files.....Max 999

InputsCombo
RCA

OutputsStereo RCA,
powered speaker out

Max SPL114dB

Fraquency range65Hz - 18KHz

Dimensions
(W x H x D).....380 x 600 x 300mm

Weight11Kg

SPECIFICATIONS

SZS-P15A

Input power	230V AC, 50Hz
RMS power	140W
Peak power	560W
Max power	600W
LF speaker	15" woofer with 2" voice coil
HF speaker	1" compression driver
Storage	USB and SD card
File system	FAT32
Playback format	MP3, WAV
Number of files	Max 999
Inputs	Combo, RCA
Outputs	Stereo RCA, powered speaker out
Max SPL	116dB
Frequency range	55Hz - 18KHz
Dimensions (W x H x D)	480 x 740 x 395mm
Weight	16.1Kg

KETTLESTRING LANE | YORK | YO30 4XF | UNITED KINGDOM
METALLVÄGEN 45A | 195 72 ROSERSBERG | STOCKHOLM | SVERIGE
LAHNSTRASSE 27 | 45478 MÜLHEIM AN DER RUHR | DEUTSCHLAND

If you have any more questions about this product, please do not hesitate to contact the Gear4music Customer Service Team on: **+44 (0) 330 365 4444** or **info@gear4music.com**