# **Product Specifications**

# KSM313/NE Dual-Voice Ribbon Microphone

### Overview

The KSM313 is a premium bi-directional ribbon microphone for world-class audio and performance. The Dual-Voice design features discrete front-andrear side sonic signatures for use with amplified instruments or in intimate vocal applications. Hand assembled in the USA with custom components and proprietary Roswellite® technology for revolutionary ribbon resilience under extreme conditions.

- Bi-directional polar pattern delivers premier audio with superior off-axis rejection
- True Dual Voicing tuned specifically for user's for choice of response warm and full for amplifiers, or swivel for bright and flattering vocals Revolutionary Roswellite® proprietary ribbon material replaces traditional foil ribbons with high tensile strength, toughness and shape memory that provides superior resilience at extreme SPLs
- Custom-sourced components for superior presence, minimized signal loss and maximized output
  146dB SPL / 30 15,000 Hz frequency response ideal for capturing fast transients in vocals, acoustic instruments and concert hall performances

Includes stand mount, aluminum flight case, velveteen pouch

- Legendary Shure quality and superior construction from hand-assembly of machined steel, silver, gold and aluminum materials
- ShureLock® stand mount for secure thread-locked mounting
- · Aluminum flight case for storage when not in use

### **Available Models**

KSM313/NE


Specifications				
Transducer Type	Roswellite® Ribbon			
Frequency Response	30Hz – 15,000Hz			
Directional Polar Pattern	Bidirectional			
Output Impedance	Transformer, balanced, actual 270 $\Omega$			
Polarity	Positive pressure on front side diaphragm produces positive voltage on pin 2 relative to pin 3, pin 1 ground			
Sensitivity (at 1 kHz, open circuit voltage)	-54.5 dBV/Pa (1.88 mV/Pa)			
Dimensions & Weight	Diameter: 4.318 cm (1.7 in) Height: 13.5 cm (5.3in) Weight: 400g (0.881 lbs)			
Max SPL	146 dB			
Connector	Three pin professional audio (XLR) male			




KSM313/NE

## **Included Accessories**

300M	ShureLock® Stand Mount	A313SC	Aluminum Flight Case	A313VB	Velveteen Pouch		
Optional	Accessories						
Δ313SM	Shock Mount	M200SM	ShureLock® Wire Rone Shock Mount	A300PC	Polishing Cloth		



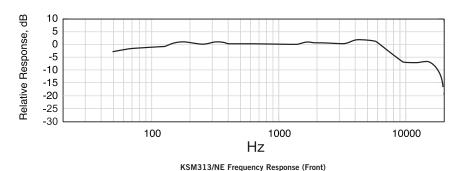

Relative Response, dB 10 5 0 -5 -10 -15 -20 -25 -30 100 1000 10000 Hz

KSM313/NE Frequency Response (Rear)

