

# F 6X

## 6 CHANNEL MIXING CONSOLE WITH MULTI-FX

### DESCRIPTION

The F 6X features 2 Mic preamp inputs, 2 mono line inputs, 2 stereo line inputs plus multi-FX with balanced main output (Stereo XLR + TRS). The mono channels are provided with 3-band EQ and stereo channels with 2-band EQ. The mixer features 16 PRO DSP internal FX presets and an Aux send (post FX) with rotary knob control.



### FEATURES

- 2 Mic/Line inputs
- 2 stereo line inputs
- One Aux/FX (post)
- Balanced main output +28 dB (Stereo XLR + TRS)
- 16 presets PRO DSP internal FX
- Sturdy metal chassis
- External universal power supply
- Designed and engineered in Italy

**TECHNICAL SPECIFICATIONS**

|                                  |                            |                |
|----------------------------------|----------------------------|----------------|
| <b>Electronic specifications</b> | Frequency Response:        | 20 Hz ÷ 20 kHz |
|                                  | THD+N, 20dB gain, 0dBu out | <0,02          |

---

|                                    |                       |                |
|------------------------------------|-----------------------|----------------|
| <b>Inputs</b>                      | Mic:                  | 2              |
|                                    | Gain Range:           | 0 dB ÷ -50 dB  |
|                                    | Mic Inputs Impedance: | 14 kohm        |
|                                    | Low Cut:              | 80 Hz          |
|                                    | Phantom Power +48V:   | Yes            |
|                                    | Mono Line:            | 2              |
|                                    | Gain Selection:       | 20 dB ÷ -30 dB |
|                                    | Line Input Impedance: | 21 kohm        |
|                                    | Stereo Line:          | 2              |
|                                    | Gain Selection:       | 20 dB ÷ -30 dB |
| Stereo Line Input Impedance (kOhm) | 15 kohm               |                |

---

|                |             |   |
|----------------|-------------|---|
| <b>Outputs</b> | Main MIX:   | 1 |
|                | FX Send:    | 1 |
|                | AUX Output: | 1 |
|                | Phones:     | 1 |

---

|                               |                             |         |
|-------------------------------|-----------------------------|---------|
| <b>Outputs specifications</b> | Main Out Level:             | 28 dBu  |
|                               | Aux Out Level:              | 28 dBu  |
|                               | Phones Out impedance (ohm): | 150 ohm |

---

|           |                    |  |
|-----------|--------------------|--|
| <b>EQ</b> | Input Channels EQ: | 2 Shelving 1   |
|           | Description:       | High: +/-15 dB @ 10 kHz Shelving,<br>Mid: +/-15 dB @ 1,250 kHz, Bell<br>Low: +/-15 dB @ 100 Hz Shelving. |

---

|                        |          |   |
|------------------------|----------|---|
| <b>Auxiliary sends</b> | FX POST: | 1 |
|------------------------|----------|---|

---

|                         |               |   |
|-------------------------|---------------|---|
| <b>Internal Effects</b> | Send Effects: | 1 |
|-------------------------|---------------|---|

---

|                       |             |     |
|-----------------------|-------------|-----|
| <b>Other features</b> | Footswitch: | Yes |
|-----------------------|-------------|-----|

---







|                                  |                          |                       |
|----------------------------------|--------------------------|-----------------------|
| <b>Electrical specifications</b> | Power supply:            | External              |
|                                  | Voltage requirements:    | 100 V - 240 V         |
|                                  | Power consumption (MAX): | 12 W                  |
| <b>Standard compliance</b>       | CE marking:              | Yes                   |
| <b>Physical specifications</b>   | Cabinet/Case Material:   | Metal                 |
|                                  | Color:                   | Black                 |
| <b>Size</b>                      | Height:                  | 79 mm / 3.11 inches   |
|                                  | Width:                   | 210 mm / 8.27 inches  |
|                                  | Depth:                   | 255 mm / 10.04 inches |
|                                  | Weight:                  | 1.8 kg / 3.97 lbs     |
| <b>Shipping informations</b>     | Package Height:          | 122 mm / 4.8 inches   |
|                                  | Package Width:           | 378 mm / 14.88 inches |
|                                  | Package Depth:           | 260 mm / 10.24 inches |
|                                  | Package Weight:          | 2.75 kg / 6.06 lbs    |

**PART NUMBER**

- **17140088**

F 6X

EAN 8024530016135

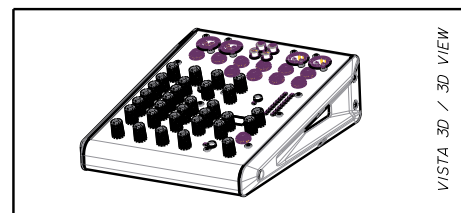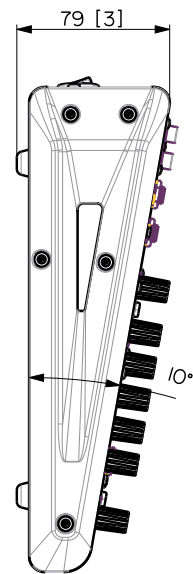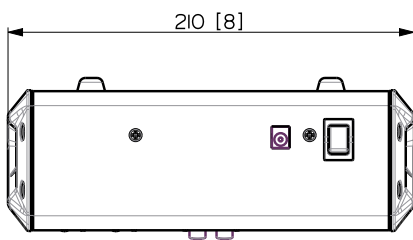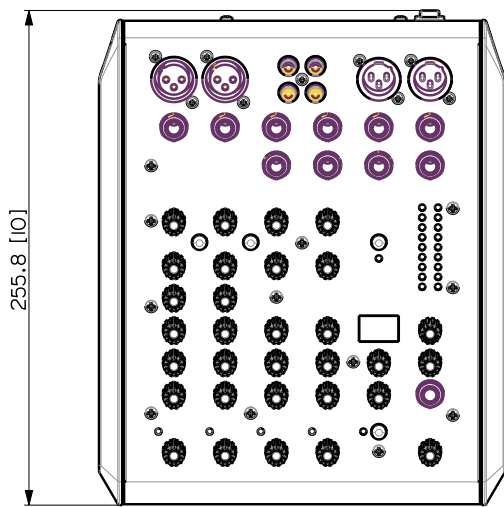

VISTA 3D / 3D VIEW



MIXER F 6X 90-240 V

REV.  
A