






roksan.com/atessa-support

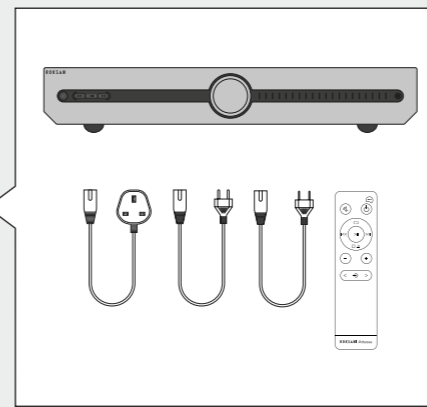


Let's get started




1 Place in suitable location

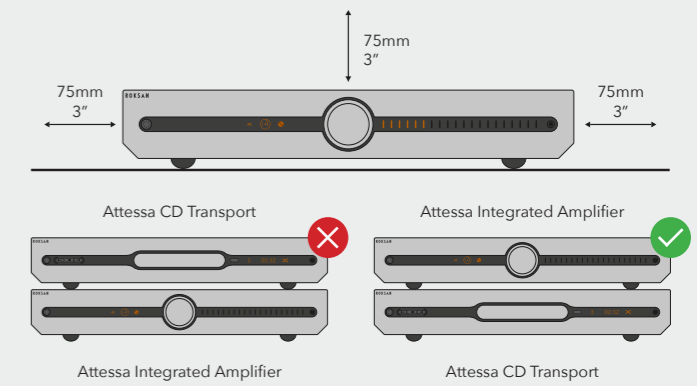

2 Power on

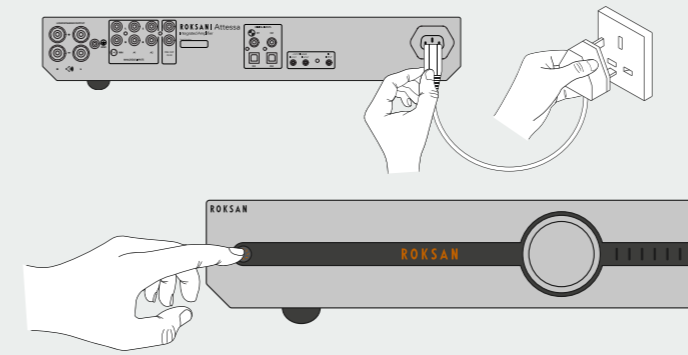

3 Download MaestroUnite App



Follow the instructions on the app to finish setting up your product.

Already have MaestroUnite? Open the app, select + then follow setup




Dimensions & Material	
Dimensions (Inc. Connect & Encoder)	H76 x W432 x D383 mm
Dimensions (Exc. Connect & Encoder)	H76 x W432 x D346 mm
Weight	10.2 Kg
Construction	Formed plated steel and bespoke machined anodised aluminium front panel
Power Amplifier	
Power Output (8 Ohms)	80Wrms Both Channels Driven, Nominal (THD+N <1%)
Power Output (4 Ohms)	130Wrms Both Channels Driven, Nominal (THD+N <1%)
THD+N	<0.02% (1KHz, 2 channels, 1W@8 Ohms, A-Weighted)
Amplifier Type	Class AB
Gain	29dB
Channel Separation	>75dB @10kHz
Channel Matching	<0.5dB
Signal to Noise Ratio	>80dBa 1W/8R, >98dBa 75W/8R
Frequency Response	5Hz to 50KHz (-3dB)
Mains Transformer Rating	400VA
Pre-Amplifier	
Volume Channel Matching	<0.25dB
THD+N	0.002% (1KHz, 2Vrms at Pre-Out)
Signal to Noise Ratio	>104dB (unweighted)
RIAA (Phono)	47k/56p loading; gain settings suitable for 12mV, 6mV, 3mV output cartridges
Bluetooth*	
Bluetooth® Type	A2DP Audio profile
Bluetooth® Codecs	SBC, aptX™, AAC
Bluetooth® Range	15m (typical)

Digital Inputs	
Digital Coax Input	up to 24bit/192kHz PCM
Digital Optical Input	up to 24bit/96kHz PCM
DAC	
Format Support	PCM
Sampling Rate	up to 192kHz/24bit
THD+N	0.001% (1KHz, 2Vrms at Pre-Out)
Signal to Noise Ratio	106dB (A-Weighted)
Power Supply	
Mains input	IEC Connector on rear panel Mains transformer will self-select for either 100-130 VAC 50/60Hz 210-240 VAC 50/60Hz (Operational down to 85VAC with reduced output power)




Bluetooth® is a registered trademark of Bluetooth SIG, Inc.
Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. aptX is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries.


Controls and Navigation

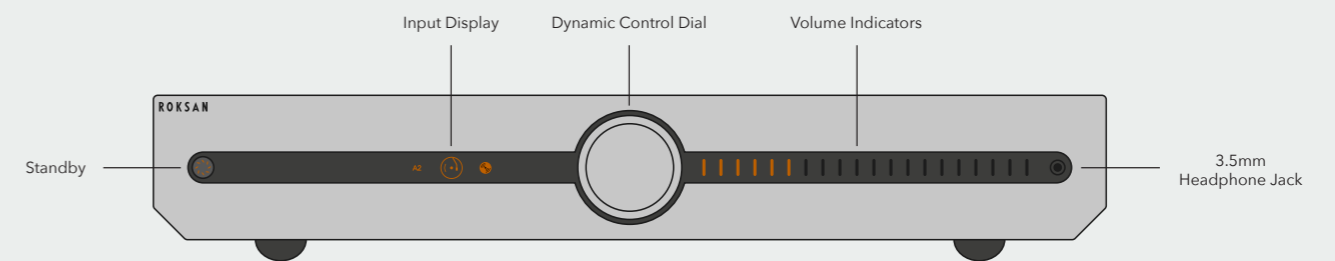


Using the Remote Control

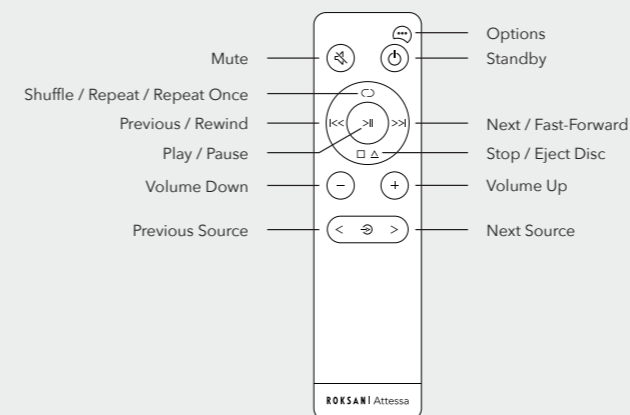

Using the Dynamic Control Dial

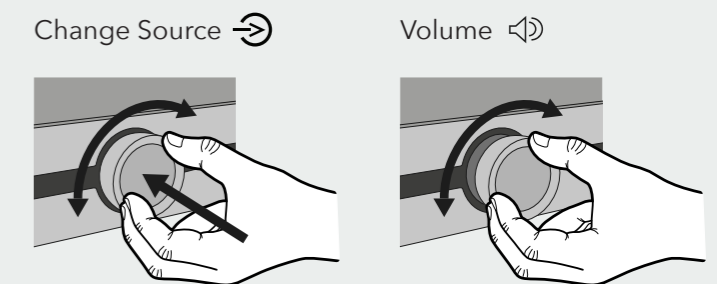



Input Display Icons and Volume




- A1**
 Analogue
 RCA
- A2**
 Analogue
 RCA
- MM Phono
 (Turntable)
- CD
 (D1)
- D2**
 Digital Coaxial
 (D2)
- D3**
 Digital Optical
 (D3)
- D4**
 Digital Optical
 (D4)
- Bluetooth*





Using Analogue RCA A1 / A2

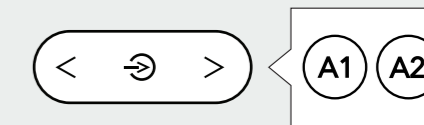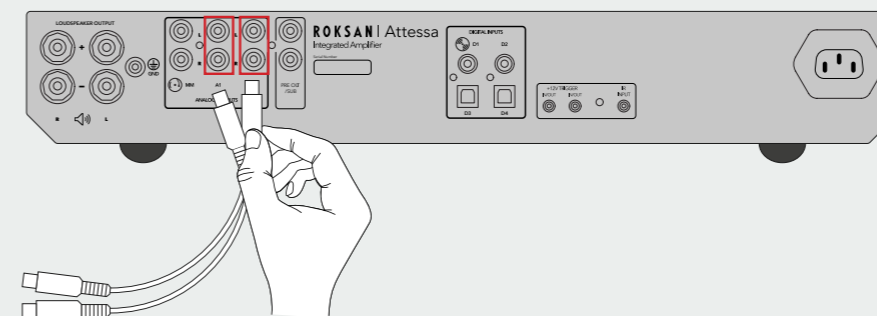


Connecting loudspeakers

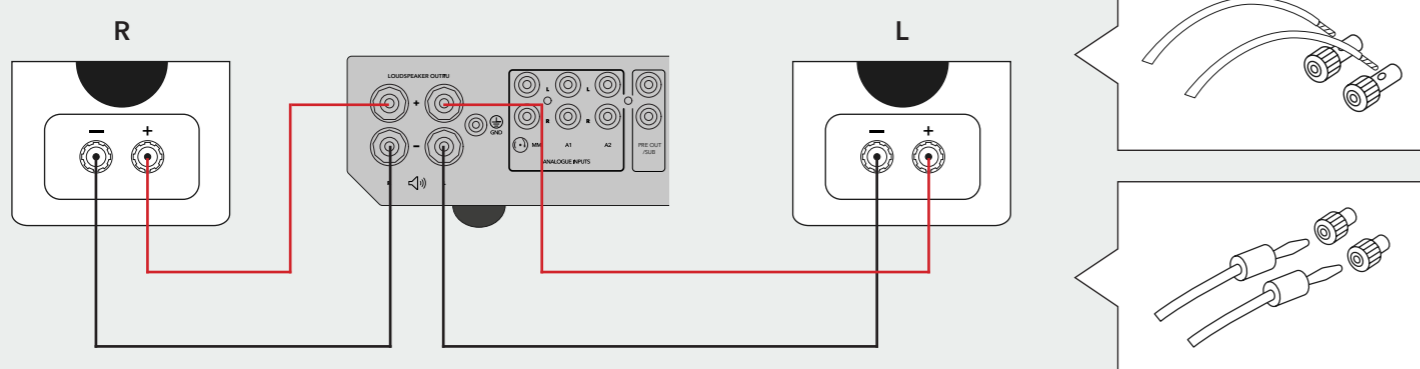



Using Digital Coaxial D1 (CD) / D3

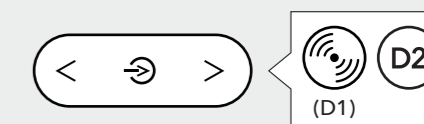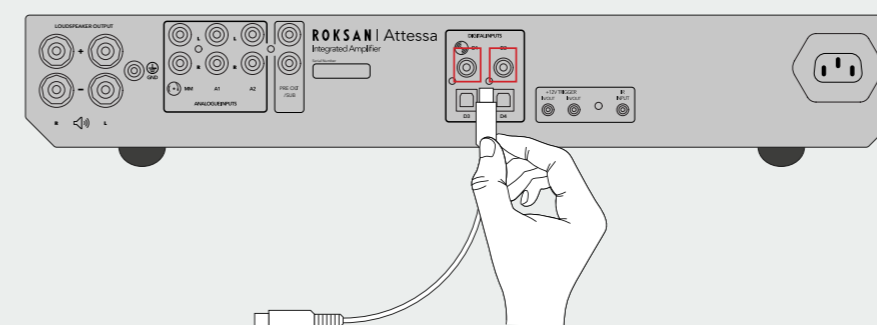


Inputs and Outputs

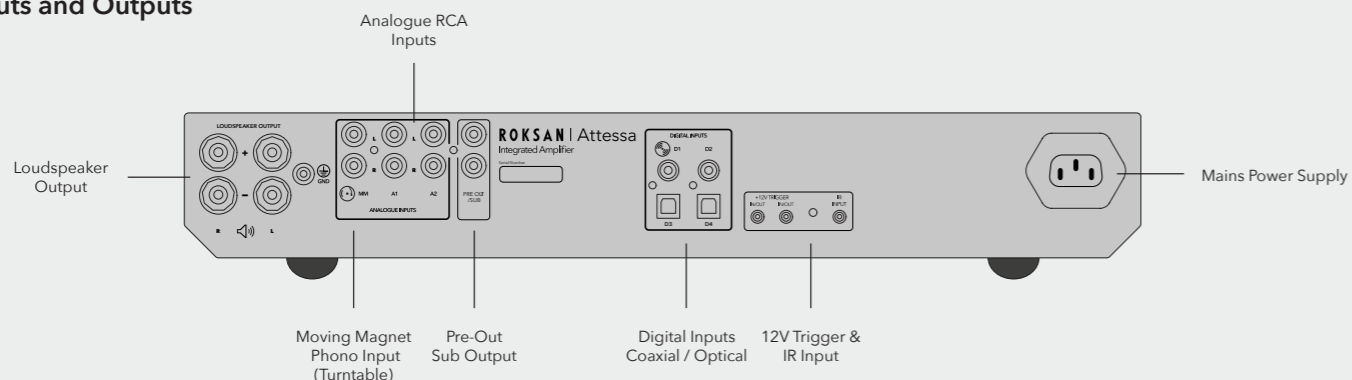



Using Digital Optical

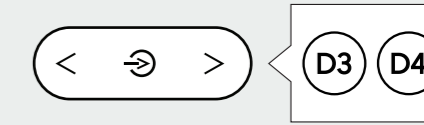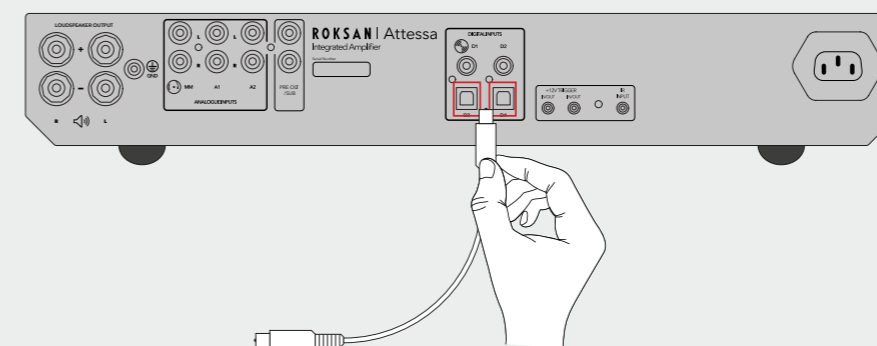

Using Moving Magnet Phono (Attesa Turntable or Passive Turntables)

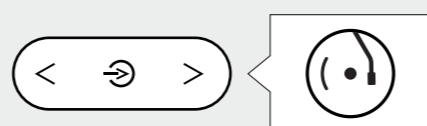

Using Bluetooth®



Attesa XX-XX

