


Installation

The required space for the RM2 Rack Mount is 4U in a well ventilated 19" equipment rack.

Attach the rack mount main chassis (1) and front frame (2) to the rack with suitable screws. Leave the screws slightly loose to allow moving the parts.

Connect the cabling to the RAM2 or RAM3 amplifier module and attach it to the rack mount with two M4 screws provided. The adapter can take up to eight RAM2 or RAM3 modules. A single blanking plate is included with each RM2 (item 4 in diagram). If needed, additional blanking plates can be purchased (order code 272-0031). Finally, tighten the screws binding the adapter to the rack. The installation is now complete.

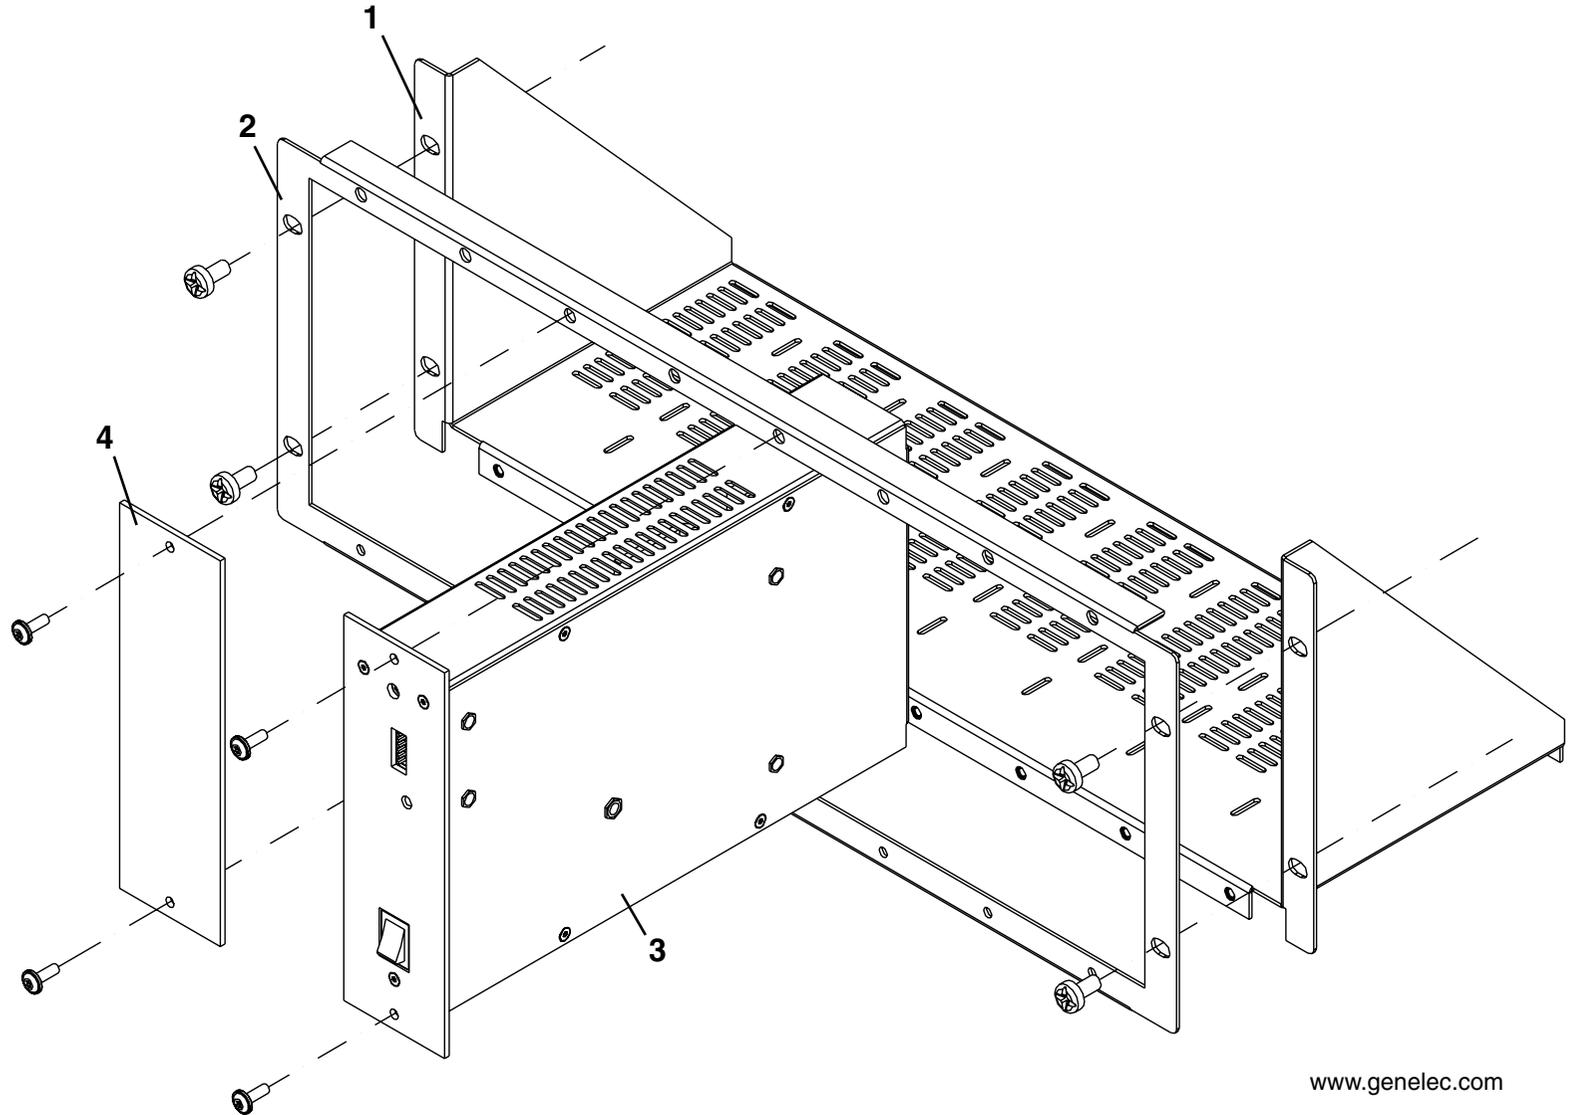

www.genelec.com

International enquiries:
Genelec, Oivitie 5
FIN-74100, Iisalmi, Finland
Phone +358 17 83881
Fax +358 17 812 267
Email genelec@genelec.com

In the U.S. please contact:
Genelec, Inc., 7 Tech Circle
Natick, MA 01760, USA
Phone +1 508 652 0900
Fax +1 508 652 0909
Email genelec.usa@genelec.com

In China please contact:
Beijing Genelec Audio Co. Ltd.
Jianwai SOHO, Tower 12, Room 3304
39 East 3rd Ring Road
Chaoyang District
Beijing 100022, China
Phone +86 10 5869 7915, Fax +86 10 5869 7914

In Sweden please contact
Genelec Sverige
Ellipsvägen 10B
P.O. Box 5521, S-141 05 Huddinge
Phone +46 8 449 7070
Fax +46 8 708 7071
Email info@genelec.com