





1. Connect the two connecting rods

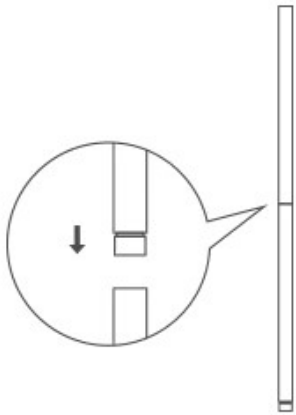


2. Connect the rod and chassis connection

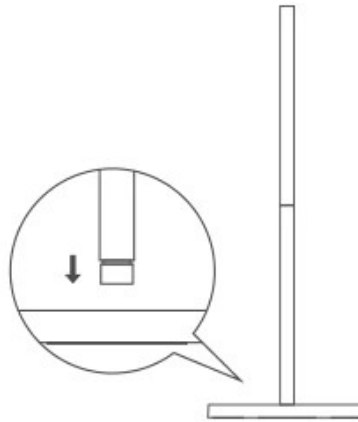


3. Rotate the gimbal clockwise into the connecting rod

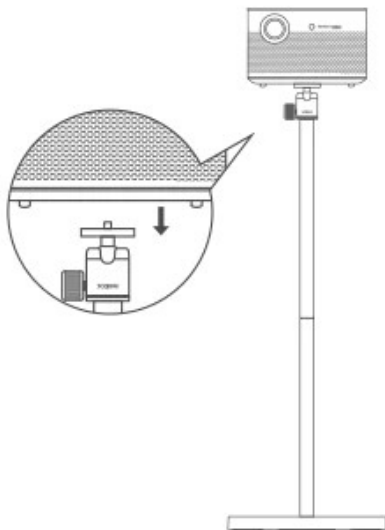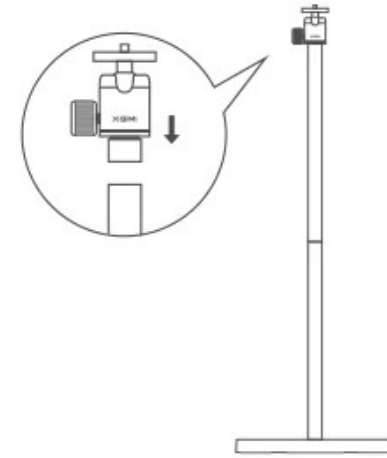

4. Align the threaded hole at the bottom of the machine with the gimbal nut

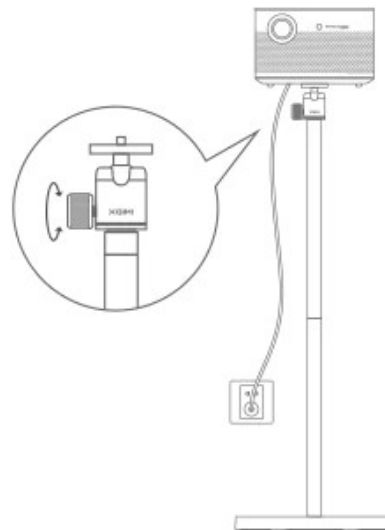

5. Connect the power supply, turn on the machine's optical machine and rotate the gimbal knob, project the picture to a suitable

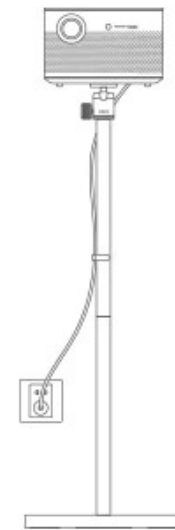

6. Clip the line card on the connecting rod, and plug the power cord