


UHD35STx

Short throw 4K UHD gaming and home entertainment projector







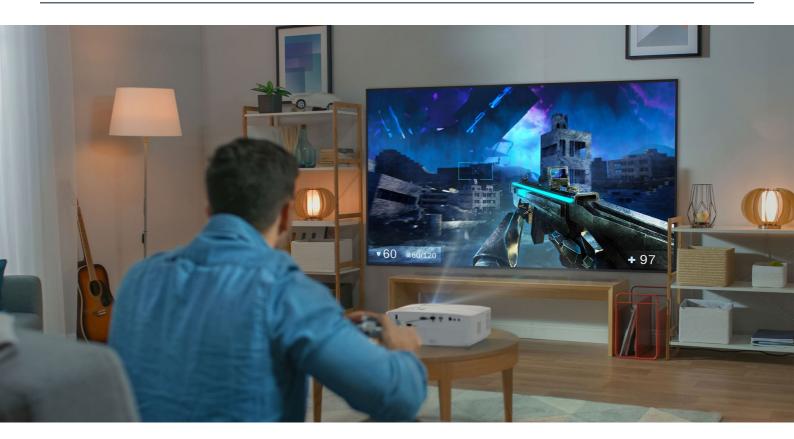

- Incredible True 4K UHD resolution visual experience - Perfect for big screen home entertainment and immersive gaming
- Short throw projection Supersized 100" image from just over a metre away
- Lights on viewing Bright 3600 lumens
- Created for a competitive gaming advantage -Supports 1080p 240Hz at 4.2ms and 4K 60Hz at 16.9ms

Immerse yourself in a world of Ultra HD gaming, live sports and TV shows. The UHD35STx delivers impressive bright 4K UHD high-quality images, lightning-fast input lag as low as 4ms and a high refresh rate of 240Hz - perfect for a competitive gaming advantage.



Featuring a short throw lens, it can be placed just over a metre away from the projection area while creating a supersized 100" image.

Specifications

UPC: 796435814533, EAN: 5055387666443, Colour: White

Display/image Display technology DIPTM Resolution UHD (3840x2160) 3,600 lumens Brightness Contrast ratio 1,000,000:1 Native aspect ratio 16.9 Aspect ratio - compatible 4:3 +/-40° Keystone correction horizontal Keystone correction - vertical +/-40° Horizontal scan rate 31 ~ 135Khz

Vertical scan rate 24 ~ 120Hz Uniformity 80%

Screen size 0.93m ~ 7.63m (36.43" ~ 300.53") diagonal

Lamp info
Light source type
Lamp watts
Lamp

Lamp life hours (up to) 4000 (Bright), 15000 (Dynamic), 10000 (Eco)

 Optical

 Throw ratio
 0.5:1

 Projection distance (m)
 0.4m - 3.3m

 Zoom
 1

 Zoom type
 Fixed

 Focal length (mm)
 7.51mm

 Lens shift
 Vertical +0%

 Connectivity

 Connections
 Inputs 2 x HDMI 2.0

Outputs 1 x Audio 3.5mm, 1 x S/PDIF, 1 x USB-A power

1.5A

116%

Control 1 x RS232, 1 x 12V trigger

 General
 Noise level (typical)
 24dB

 Noise level (max)
 28dB

PC compatibility UHD, WQHD, WUXGA, FHD, UXGA, SXGA, WXGA, HD, XGA,

SVGA, VGA, Mac

2D compatibility 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz),

1080p(50/60Hz), 2160p(50/60Hz)

3D compatibility Frame-pack: 1080p24, 720p50 / 60

3D Full 3D

 Security
 Security bar, Kensington Lock, Password protected interface

 OSD / display languages
 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish

Operating conditions 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max

humidity 85%

Remote control Backlit home remote

 Speaker count
 1

 Watts per speaker
 10W

 In the box
 AC pow

n the box AC power cord
Remote control
2x AAA batteries

Basic user manual Input lag 4.00ms

Power

Native offset

Power supply 100 ~ 240V, 50 ~ 60Hz

 Power consumption (standby)
 0.5W

 Power consumption (min)
 220W

 Power consumption (max)
 320W

Weight and dimensions

 Dimensions (W x D x H) mm
 315 x 270 x 118

 Gross weight
 4.68 kg

 Net weight
 3.5 kg





