

## HAK360

DJ MIXERS

*Professional DJ Mixer*



### PRODUCT OVERVIEW

The HAK 360 is a 2 channel professional battle DJ mixer, designed and manufactured with expert consultation from DMC and ITF champions all over the world.

### KEY FEATURES

- 2 mixing channels
- 2 PHONO/LINE channel
- 1 MICRO input
- 2 Main outputs XLR and RCA with independent gain
- Independent balance per channel
- 3 band full cut EQ
- 45mm long life VCA faders
- 45mm long life VCA crossfader
- Fader and crossfader shape adjustment
- Crossfader Reverse and Cut-In
- Crossfader suitable for ETERNAL




### APPLICATIONS

- Pubs
- Night Clubs
- Mobile Shows
- Fitness Centres

### CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

MECHANICAL DIAGRAMS

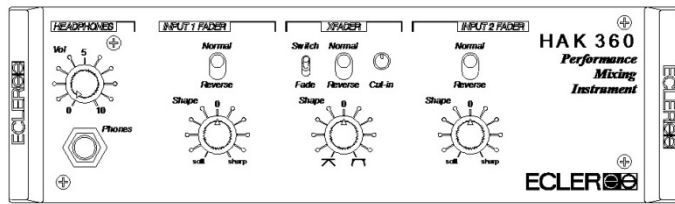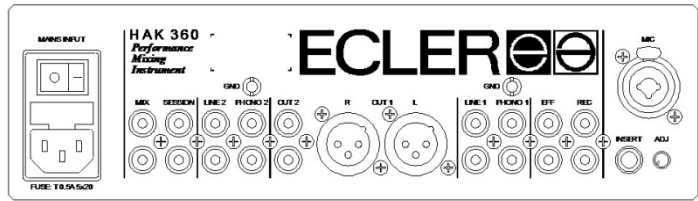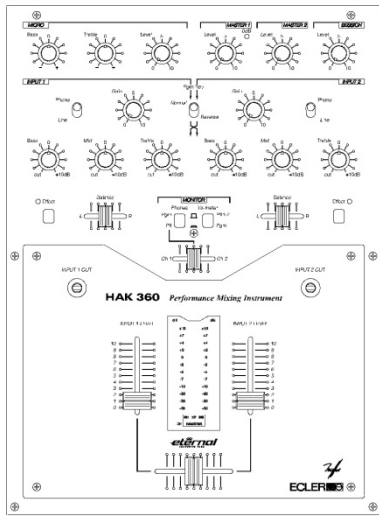

TECHNICAL DATA

<b>Inputs Sensitivity nom/Impedance</b>	LINE	-10dBV/50kΩ
	MICRO (BAL)	-50÷-30dBV/1.5kΩ
	PHONO	-45dBV/50kΩ
	SESSION	0dBV/20kΩ
	INSERT	0dBV/100kΩ
<b>Outputs Level/Minimum Load</b>	MIX	0dBV/20kΩ
	OUT 1 (BAL)	0(+6)*dBV 600Ω 1(2)V
	OUT 2	+6(0)*dBV 1kΩ 2(1)V
	INSERT (MIC)	0dBV/1kΩ
	EFFECT	0dBV/1kΩ
<b>Maximum Input Level (full gain)</b>	REC	0dBV/10kΩ
	HEADPHONES	230mΩ/400Ω
	LINE	+8dBV
	MICRO	-10dBV
<b>Input Tone Adjust</b>	PHONO	-28dBV
	MICRO	±10dB@100Hz ±10dB@10kHz
<b>Frequency Response</b>	LINE	10Hz÷30kHz -1dB
	MICRO	10Hz÷30kHz -1dB
	PHONO	RIAA ±0.5dB
<b>THD+N</b>	LINE	<0.05%
	MICRO	<0.15%
	PHONO	<0.09%
<b>CMRR</b>	MICRO	>75dB @ 1kHz
	LINE	>100dB
<b>Signal Noise Ratio</b>	MICRO	>75dB
	PHONO	>85dB
	LINE	>100dB
<b>Gain control Inputs 1-4</b>		± 15dB *(±6dB)
<b>Tone control</b>	BASS	+10/-30dB
	MID	+10/-25dB
	TREBLE	+10/-30dB
<b>Kill Filters (cut freq. @-6dB)</b>	BASS	200Hz
	MID	6.5kHz & 200Hz
	TREBLE	6.5kHz

<b>Phantom voltage</b>	+18VDC/5mA max.
<b>Mains</b>	90-264VAC 47-63Hz
<b>Power consumption</b>	22VA
<b>Dimensions</b>	365x360x80mm
<b>Weight</b>	4.3kg

\*internally selectable