

Uni-Vibe®

**UV-1FC
UNI-VIBE® FOOT CONTROLLER**



UV-1

UV-1FC

Thank you for purchasing the UV-1 Uni-Vibe® effect and the UV-1FC foot controller. We hope you experience many years of sonic pleasure.

The UV-1FC is the remote speed controller specifically designed for the Dunlop UV-1 Uni-Vibe® effect pedal.




Dunlop Mfg. Inc.
P.O. Box 846 Benicia, CA 94510 U.S.A.
Phone (707) 745-2722 • FAX (707) 745-2658
E-mail: [dunlop @ a.crl.com](mailto:dunlop@a.crl.com)

Operating Instructions

Using a standard 1/4" stereo cable, plug one end of the cable into the remote jack located on the UV-1 unit and the other end into the UV-1FC.

Notice that by connecting the UV-1FC foot controller, the *speed* and *on/off* functions on the UV-1 are disabled and have been transferred to the UV-1FC remote.



With the UV-1FC in the heel down position, the UV-1 is turned off. Move the toe down slightly to activate the UV-1 effect. The speed can be increased by rocking the pedal forward to the toe down position; to decrease the speed, move the rocker towards the heel down — all the way down to turn off the UV-1 effect.

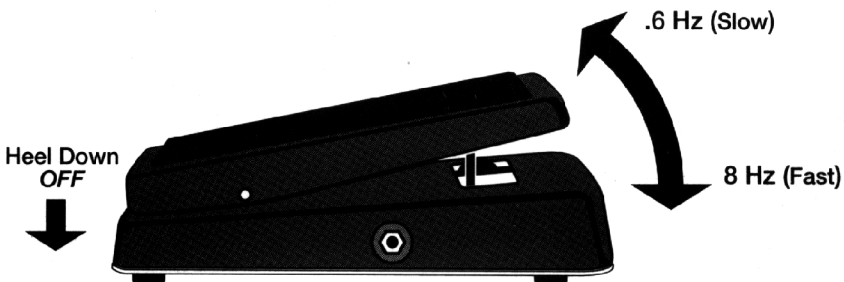

As you use the UV-1FC foot controller, you may find that it is too loose or too tight (when rocking the pedal) for your preference. The tension adjustment is located at the rear of the pedal. A 7/64 allen wrench is required for this adjustment. Simply turn the allen screw counter-clockwise to loosen the pedal; clockwise to tighten.

CAUTION: Be careful not to remove the allen screw from the pedal.

Back of Unit

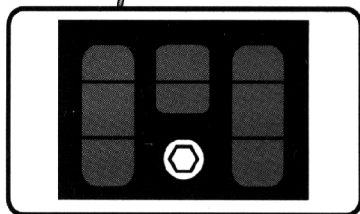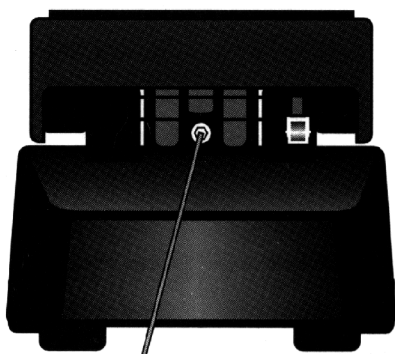

Rocker Top Tension Adjustment
Use 7/64 allen wrench


Counter Clockwise
Loosen


Clockwise
Tighten