

Metal Stomp Chromatic Tuner

**AT-08**

**OWNER'S MANUAL**


Thank you for purchasing Aroma stomp chromatic tuner AT-08.

**AROMA**

Aroma Music Co., Ltd.

© 2011 Aroma Music Co., Ltd.

## Operation and Function

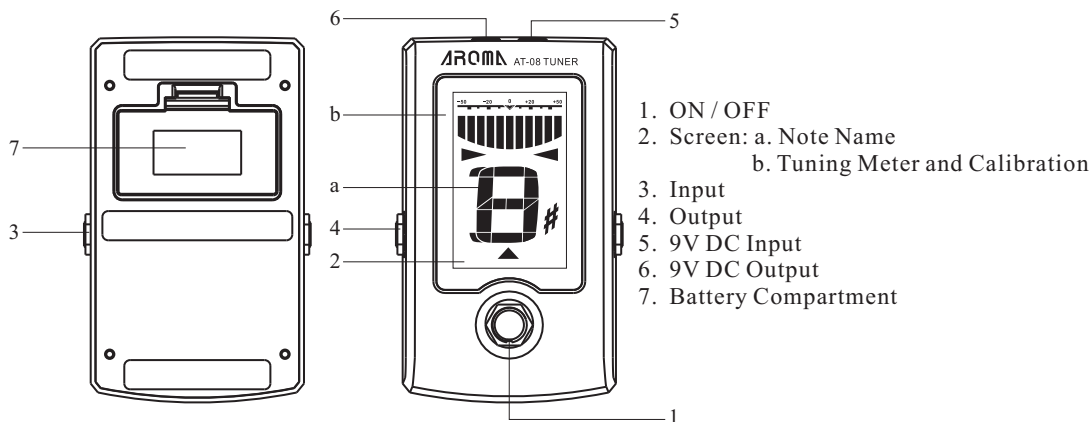

## Specification

Tuning Mode	: Chromatic
Tuning Range	: A0 (27.5Hz) - C8 (4186.00Hz)
Tuning Way	: The singal input must be connected
Tuning Tolerance:	±0.5 cent
Power	: 6F22 battery, or 9V DC
Dimension	: 125mm×73.8mm×40mm
Weight	: 353g
Attachment	: Manual, Battery

## How to Use

1. Install a battery, or link a AC-DC 9V connector. Pelase pay much attention to polarity.
2. Link the input, and the tuner automatically turns on. When the tuner is on, the singal can't get through the output. When turn off the tuner by pressing the ON / OFF button, the signal will pass through the output.
3. Play a single note from your instrument, the note name will appear in the tuner screen. The screen color will change, and the tuning needle will move.
  - The screen turns green, the center needle appears, both triangles besides the note name appear: in tune.
  - The screen is white, the left tuning needles appear, the triangle at the left side of the note name appears: flat note
  - The screen is white, the right tuning needles appear, the triangle at the right side of the note name appears: sharp note.
4. When disconnect the Input, the tuner will turn off automatically.