




HD MB40KG

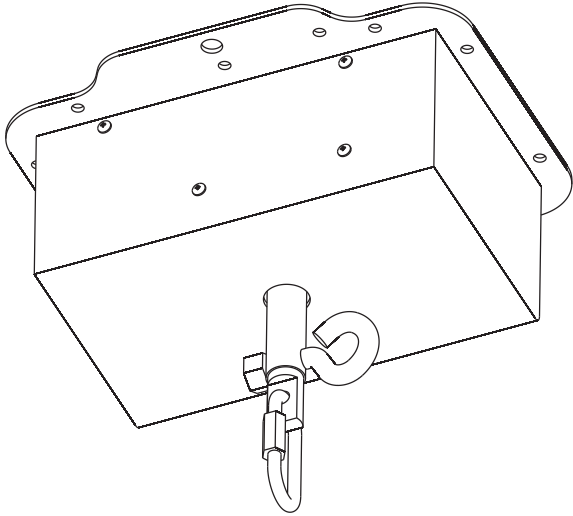

SPECIFICATIONS:

Working Position:	Upside Down
Power:	120V/60Hz
Weight:	6lbs./ 2.5Kgs.
Length:	11.25" (L) x 9.5" (W) x 4.5" (H) 280 x 240 x 110mm
Rotation Speed:	1 - 1.5 R.P.M.
Max Load:	89 lbs/40Kgs
Warranty:	1 Year (365 days)

Introduction: The HD MB40KG is a heavy-duty 1.5 R.P.M. mirror ball motor from American DJ that will work with mirror balls up to 39 inches (1m) that weigh up to 89lbs (40 kgs.). Just plug it in and it will start to work immediately. The HD MB40KG is easy-to-use and is intended for indoor use for night clubs and permanent installations or in mobile applications for mobile DJs or bands.

Unpacking: Thank you for purchasing the HD MB40KG by ADJ Products, LLC. Every HD MB40KG has been thoroughly tested and has been shipped in perfect operating condition. Carefully check the shipping carton for damage that may have occurred during shipping. If the carton appears to be damaged, carefully inspect your fixture for any damage and be sure all accessories necessary to operate the unit has arrived intact. In the case damage has been found or parts are missing, please contact our toll free customer support number for further instructions. Do not return this unit to your dealer without first contacting customer support.

In order to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this user manual.

Important: Damages caused by the disregard of this user manual are not subject to warranty. The dealer will not accept liability for any resulting defects or problems.

SAFETY INSTRUCTIONS:

CAUTION: Be careful when operating. A dangerous voltage can give you a dangerous electric shock when touching the wires!

- This device has left our building in an absolutely perfect condition. In order to maintain this condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this user manual.
- If the device has been exposed to drastic temperature fluctuation (e.g. after transportation), do not it on immediately. The arising condensation water might damage your device. Leave the device switched off until it has reached room temperature.

ELECTRICAL PRECAUTIONS:

- The electric connection must only be carried out by a qualified electrician!
- Never let the power-cord come into contact with other cables! Handle the power-cord and all connections

with the mains with particular caution!

- Make sure that the available voltage is not higher than the device's stated voltage.
- Make sure that the power-cord is never crimped or damaged by sharp edges. Check the device and the power-cord from time to time.
- Always disconnect the power, when the device is not in use or before cleaning it.
- Keep away children!

INSTALLATION & PRECAUTIONS:

• **THE MAXIMUM WEIGHT THAT THE MIRROR BALL MOTOR CAN HOLD MUST NOT EXCEED 89LBS.**

- This product was designed for indoor use only.
- Make sure that the area located below the installation is clear when rigging, derigging or servicing the fixture.
- Please save and use the original packaging for transportation.
- If this mirror ball motor is operated in any way different to the way described in this manual, the product may suffer damages and the guarantee becomes void. Furthermore, any other operation may lead to dangers like short-circuits, burns, electric shock, crash etc.
- Please consider the EN 60598 norms during the installation!
- The installation must only be carried out by a qualified electrician or an authorized dealer!
- The installation structure of the mirror ball has to be built and constructed in a way that it can hold 5 times the weight for 1 hour without any causing any deformation of the installation structure.
- The installation must always be secured with a secondary safety attachment, e.g. an appropriate catch net. This secondary safety attachment must be used in a way that no part of the installation can fall down if the main attachment fails, e.g. a safety cable.
- Rigging/installing, derigging or servicing the fixture over any high working places, general public, and other dangerous areas is forbidden.
- The operator has to make sure that safety-relation and machine-technical installations are approved by an expert before operating for the first time and after any changes in installation.
- The operator should make sure that safety-relation and machine-technical installations are approved by an expert after every four years.
- The operator should make sure that safety-relation and machine-technical installations are approved by a skilled person once a year.
- The mirror ball should be installed outside areas where persons may walk by or be seated.
- The chosen installation spot must be in a way that the motor can be installed in an absolutely horizontal position.
- The motor and the mirror ball must be installed out of the reach of people.
- If the motor shall be lowered from the ceiling or high joists, professional trussing systems have to be used. The motor must never be installed in a way that it can swing freely in the room.


Caution: Mirror balls will cause severe injury if it happens to come crashing down! If you have any doubts concerning the safety of a possible installation, do NOT install the motor!

• **BEFORE RIGGING MAKE SURE THAT THE INSTALLATION STRUCTURE IS ABLE TO HOLD A MINIMUM OF 400LBS. POINT LOAD.**

- Please install the mirror ball motor using all 10-fixation holes.
- Only use the appropriate screws and make sure that the screws are properly connected with the ground.
- If the unit will be directly connected with the local power supply network, a disconnection switch with a minimum opening of 3 mm at every pole has to be included in the permanent electrical installation.
- The mirror ball has to be connected via an appropriate installation with the motor. We recommend using Chain for Mirror balls up to 50 cm certified, or Chain for Mirror ball up to 100 cm certified.

Caution: The installation material must never include abrading material e.g. steel cables in order to avoid material wearing.

- The length of the chain must never exceed 100 cm.

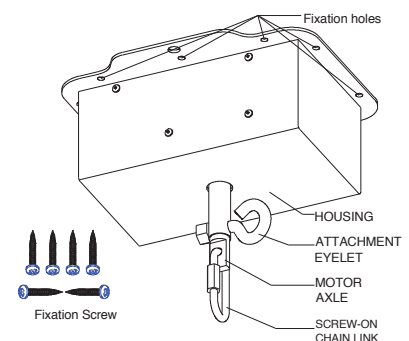

- Insert the chain with the mirror ball in the screw-on chain link and lighten the fixation screw.
- Make sure that the rotation of the mirror ball is never slowed down or stopped/obstructed.
- Please check in regular intervals, if the key ring or chain links have been deformed/damaged. Remove the mirror ball installation immediately!

CLEANING AND MAINTENANCE

- We recommend a frequent cleaning of the device. Please use a soft lint-free and moistened cloth. Never use alcohol or solvents!
- There are no serviceable parts inside the device. Maintenance and service operations are only to be carried out by authorized dealers.
- Should you need any spare parts, please use genuine parts.
- If the power supply cable of this device becomes damaged, it has to be replaced by authorized dealers only in order to avoid hazards.
- Should you have further questions, please contact your dealer.

Caution! No user serviceable parts do not attempt repairs. In the event your HD MB40KG should fail, contact ADJ Products, LLC.

Customer Support: ADJ Products, LLC provides a toll free customer support line, to provide set up help and to answer any question should you encounter problems during your set up or initial operation. You may also visit us on the web at www.americandj.com for any comments or suggestions. Service Hours are Monday through Friday 8:00 a.m. to 4:30 p.m. Pacific Standard Time.

Voice: (800) 322-6337 Fax: (323) 582-2941 E-mail: support@americandj.com

The HD MB40KG carries a 1 year (365 days) limited warranty. Please fill out the enclosed warranty card to validate your purchase. All returned service items whether under warranty or not, must be freight pre-paid and accompany a return authorization (R.A.) number. If the remote is under warranty you must provide a copy of your proof of purchase invoice. Please contact ADJ customer support for a R.A. number.

MANUFACTURER'S LIMITED WARRANTY

- A. ADJ Products, LLC hereby warrants, to the original purchaser, ADJ Products, LLC products to be free of manufacturing defects in material and workmanship for a prescribed period from the date of purchase (see specific warranty period on reverse). This warranty shall be valid only if the product is purchased within the United States of America, including possessions and territories. It is the owner's responsibility to establish the date and place of purchase by acceptable evidence, at the time service is sought.
- B. **For warranty service you must obtain a Return Authorization number (RA#) before sending back the product—please contact ADJ Products, LLC Service Department at 800-322-6337.** Send the product only to the ADJ Products, LLC factory. All shipping charges must be pre-paid. If the requested repairs or service (including parts replacement) are within the terms of this warranty, ADJ Products, LLC will pay return shipping charges only to a designated point within the United States. If the entire instrument is sent, it must be shipped in its original package. No accessories should be shipped with the product. If any accessories are shipped with the product, ADJ Products, LLC shall have no liability whatsoever for loss of or damage to any such accessories, nor for the safe return thereof.
- C. This warranty is void if the serial number has been altered or removed; if the product is modified in any manner which ADJ Products, LLC concludes, after inspection, affects the reliability of the product; if the product has been repaired or serviced by anyone other than the ADJ Products, LLC factory unless prior written authorization was issued to purchaser by ADJ Products, LLC; if the product is damaged because not properly maintained as set forth in the instruction manual.
- D. This is not a service contract, and this warranty does not include maintenance, cleaning or periodic check up. During the period specified above, ADJ Products, LLC will replace defective parts at its expense with new or refurbished parts, and will absorb all expenses for warranty service and repair labor by reason of defects in material or workmanship. The sole responsibility of ADJ Products, LLC under this warranty shall be limited to the repair of the product, or replacement thereof, including parts, at the sole discretion of ADJ Products, LLC. All products covered by this warranty were manufactured after August 15, 2012, and bear identifying marks to that effect.
- E. ADJ Products, LLC reserves the right to make changes in design and/or improvements upon its products without any obligation to include these changes in any products theretofore manufactured.

No warranty, whether expressed or implied, is given or made with respect to any accessory supplied with products described above. Except to the extent prohibited by applicable law, all implied warranties made by ADJ Products, LLC in connection with this product, including warranties of merchantability or fitness, are limited in duration to the warranty period set forth above. And no warranties, whether expressed or implied, including warranties of merchantability or fitness, shall apply to this product after said period has expired. The consumer's and/or Dealer's sole remedy shall be such repair or replacement as is expressly provided above; and under no circumstances shall ADJ Products, LLC be liable for any loss or damage, direct or consequential, arising out of the use of, or inability to use, this product.

This warranty is the only written warranty applicable to ADJ Products, LLC Products and supersedes all prior warranties and written descriptions of warranty terms and conditions heretofore published. This warranty was revised after December 1, 2012.

MANUFACTURER'S LIMITED WARRANTY PERIODS:

- **Lighting Products = 1-year (365 days) Limited Warranty** (Such as: Special Effect Lighting, Intelligent Lighting, UV lighting, Strobos, Fog Machines, Bubble Machines, Mirror Balls, Par Cans, Trussing, Lighting Stands etc. excluding LED, Laser Products and lamps)
- **Laser Products = 90-Day Limited Warranty**
- **L.E.D. Products = 3-year (1095 days) Limited Warranty** (excluding motors, PCB boards, and power supplies, which have a 1-year (365 day Limited Warranty) and batteries which have a 180 day limited warranty). Only the L.E.D.s carry a 3-year warranty

Follow Us On:



facebook.com/americanadj
twitter.com/americanadj
youtube.com/adjlighting

ADJ Products, LLC
6122 S. Eastern Ave. Los Angeles, CA 90040 USA
Tel: 323-582-2650 / Fax: 323-725-6100
Web: www.adj.com / E-mail: info@adj.com

A.D.J. Supply Europe B.V.
Junostraat 2
6468 EW Kerkrade
Netherlands
service@adj.eu / www.adj.com
Tel: +31 45 546 85 00 / Fax: +31 45 546 85 99