

Rout



Description

Rout is a voltage controlled gate switch. The signal present at the input can be sent to one of four outputs. Great for splitting a pattern across multiple voices or creating variations in a patch with a single gate source, Rout is a powerful addition to any rack's rhythm section.

- Send one input to any of four gate outputs
- Dynamic gate routing under voltage control

Table of Contents

Installation/Specifications	4
Rout	5
General Functions Overview	6

Installation


To install, locate 2 HP of space in your Eurorack case and confirm the positive 12 volts and negative 12 volts sides of the power distribution lines. Plug the connector into the power distribution board of your case, keeping in mind that the red band corresponds to negative 12 volts. In most systems, the negative 12 volt supply line is at the bottom. The power cable should be connected to the Rout with the red band facing the front of the module.

Specifications

Format: 2 HP Eurorack module

Depth: 47mm (Skiff Friendly)

Max Current: +12V = 26mA
-12V = 6mA

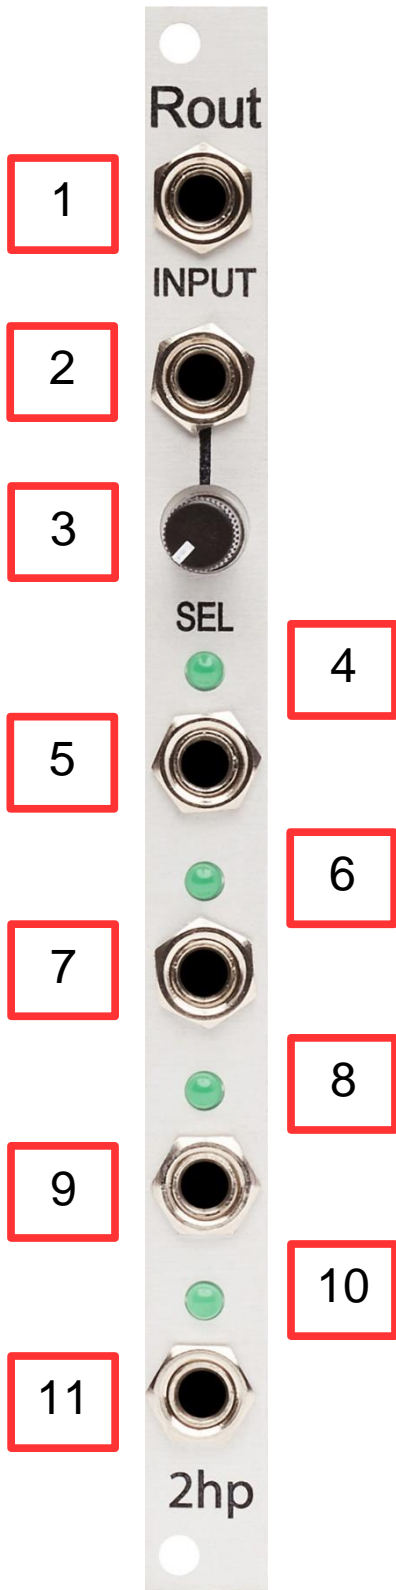

General Functions Overview

1. INPUT

Gate/trigger input to be sent to one of the four outputs

Threshold: 2.5V

2. SEL CV:

Control voltage input for SEL

Range: 0V – 5V

3. SEL:

Output selection control

If the SEL knob is far left, OUT 1 will be selected

If the SEL knob is far right, OUT 4 will be selected

4. OUT LED 1:

LED that indicates the voltage present at OUT 1

5. OUT 1:

Gate/trigger output that, when selected, will output the voltage present at the INPUT

Range: 0V – 5V

6. OUT LED 2:

LED that indicates the voltage present at OUT 2

7. OUT 2:

Gate/trigger output that, when selected, will output the voltage present at the INPUT

Range: 0V – 5V

8. OUT LED 3:

LED that indicates the voltage present at OUT 3

9. OUT 3:

Gate/trigger output that, when selected, will output the voltage present at the INPUT

Range: 0V – 5V

10. OUT LED 4:

LED that indicates the voltage present at OUT 4

11. OUT 4:

Gate/trigger output that, when selected, will output the voltage present at the INPUT

Range: 0V – 5V