



LIVE TO PLAY LIVE®

FUZZFACE®
FFM2 MINI



JIMDUNLOP.COM

92503014462 REVA

FFM2 MINI FUZZ FACE

DESCRIPTION

- Legendary Fuzz Face tone with pedalboard-friendly size, AC power and on/bypass status LED
- Based on '66-'68 era pre-silicon Fuzz Faces
- Warm vintage fuzz tones provided by slightly mismatched germanium transistors
- True Bypass

POWER

The FFM2 Fuzz Face is powered by one 9 volt battery (open battery door on underside of pedal to install), a 9 volt AC Adapter such as the Dunlop ECB003/ECB003EU or a power supply such as the DC Brick™.

DIRECTIONS


- Run a cable from your guitar to the Fuzz Face's Input jack and another cable from the Face Face's Output jack to your amplifier.
- Start with both controls at 12 o'clock.
- Turn the effect on by depressing the footswitch.
- Rotate the VOLUME knob clockwise to increase overall effect volume or counterclockwise to decrease it.
- Rotate the FUZZ knob clockwise to increase amount of fuzz or counterclockwise to decrease it.

SPECIFICATIONS

Input Impedance	10 k Ω
Output Impedance	
Max Volume	2 k Ω
-6 dB Volume	115 k Ω
Max Gain	45 dB
Bypass	True Hardwire
Current Draw	3.4 mA
Power Supply	9 volts DC

CONTROLS

- 1 VOLUME knob controls overall effect volume
- 2 FUZZ knob controls amount of fuzz
- 3 FOOTSWITCH toggles on/ bypass (Blue LED indicates on)

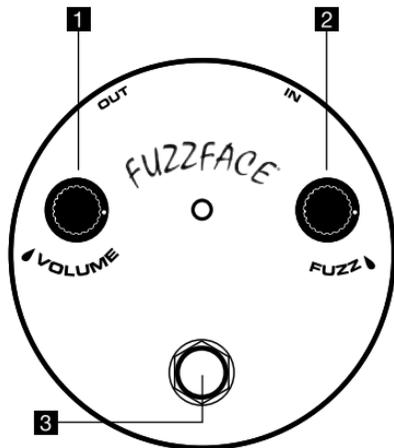

DUNLOP MANUFACTURING, INC.
P.O. BOX 846 BENICIA, CA 94510 U.S.A.
TEL: 1-707-745-2722 FAX: 1-707-745-2658