

KANTA N°2

Specification sheet



Kanta N°2 is a three-way floor standing loudspeaker totally dedicated to performance. Kanta N°2 is equipped with a new generation IAL tweeter featuring a Beryllium inverted dome and Flax sandwich cone speaker drivers. This is an unprecedented combination of technologies to guarantee precise, detailed and warm sound. Focal's latest acoustic innovations have been integrated into these floorstanders encompassing a modern and distinctive design. These loudspeakers are perfect for rooms measuring up to 320ft² (30m²) and they're also ideal for larger rooms of up to 750ft² (60m²).

- 6¹/₂" (16.5cm) midrange
Flax cone
TMD suspension
NIC motor
• Precise and detailed midrange

- Latest generation IAL 3
Beryllium tweeter

- 2 x 6¹/₂" (16.5cm) woofers
Flax cone
NIC motor
• Deep and articulated bass

- Moulded multi-ply cabinet with great neutrality



- Magnetic grilles
Easy to put in place

- High-density Polymer front panel
Inert baffle for improved definition

- Powerflow multi-port technology
No dynamic compression
Front and rear ports

Kanta N°2, Walnut cabinet, Matt Warm Taupe and Ivory front panels


Standard finishes:



Black High Gloss
Cabinet



Wood Veneer
Cabinet

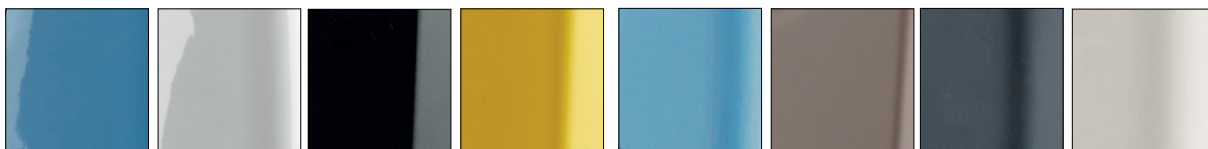

Front Panel (High Gloss finishes)

Front Panel (Mat finishes)

Key points:

- Transducers integrating Focal's latest technologies
- Speaker drivers developed and manufactured in France by Focal
- Numerous standard finishes

KANTA N°2

Specification sheet



Technical specification:

Type	3 way bass-reflex floor standing loudspeaker
Drivers	Two 6 ¹ / ₂ " (16.5cm) Flax woofer with NIC motor 6 ¹ / ₂ " (16.5cm) Flax midrange with TMD suspension and NIC motor 1 ¹ / ₁₆ " (27mm) 'IAL3' pure Beryllium inverted dome tweeter
Sensitivity (2,83V/1m)	91dB
Frequency Response (+/-3dB)	35Hz - 40kHz
Low Frequency Point (- 6dB)	29Hz
Nominal Impedance	8Ω
Minimum Impedance	3.1Ω
Recommended Amplifier Power	40 - 300W
Crossover Frequency	260Hz - 2,700Hz
Dimensions (H x W x D)	44 ¹ / ₆₄ x 18 ²⁵ / ₃₂ x 12 ⁴¹ / ₆₄ (1,118 x 477 x 321 mm)
Net weight (with front grille)	77.2lbs (35kg)
Packaging dimensions (HxWxD)	49 ³⁹ / ₆₄ x 27 ¹¹ / ₆₄ x 16 ¹⁷ / ₃₂ " (1,260 x 690 x 420mm)
Total weight (including packaging)	88.2lbs (40kg)